

## BEACON

A Bluetooth beacon is a small wireless device that works based on Bluetooth Low Energy. It repeatedly and securely sends out message at regular interval that other devices can see.

When the device enters its range, the location will be uploaded to be Beacon location.

## Getting to know your device


- *Front*



ON/OFF button

Scan QR code for BLE  
MAC address.

- *Back*



Area to stick double  
sided tape

- *Side*



## Accessories




Double Sided Tape

## Getting to know your device

### • Power ON

Long press the button for 3s, after the successful Power ON the LED will glow.



## ● Status check


Short press the button (less than 1S), the LED will glow while the button is pressed, indicating that the device is working properly;

After the status check is completed, if the LED flashes twice, the battery power is less than 10%.



## • Power Off

To turn the beacon off, press and hold the button for 3 seconds.



# Getting to know your device

Beacon 1




Device




Beacon 2



The beacons provide indoor locations information for room-by-room statistics.

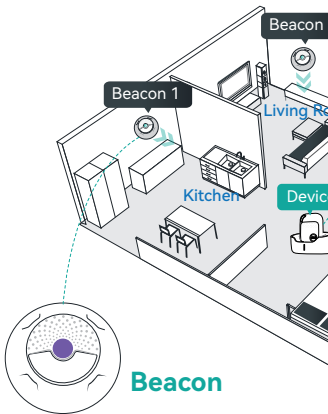

## Device

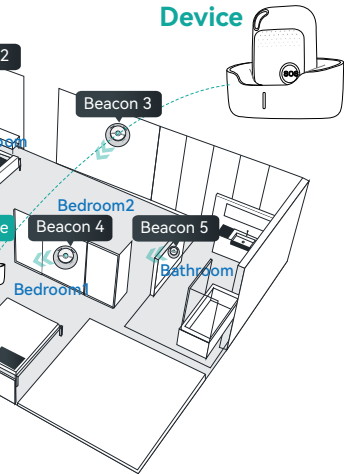

## Features

- 1 Small and light weight, easy to install.
- 2 It designed to use with Eview Personal mobile alarms and Pet trackers.
- 3 It include button battery CR2477, the battery can last around 2 years.
- 4 The beacons provide at home / out of home information in addition to optimizing mobile alarm and pet tracker's battery life.
- 5 Built-in temperature sensor, it measures the temperature of its environment and sends data to monitor center or your mobile phone.

## Hardware specifications

- 1 BLE: BLE 5.0
- 2 Waterproof: IPX8
- 3 Button battery: 3.7V, CR2477, the battery can last around 2 years
- 4 CPU/MCU: NRF52810
- 5 Size: 48.5\*15mm
- 6 Weight: 25g

# Quick Start Guide



MINI Size



Power Saving

